

LDG Balun and Unun User's Manual



Introduction

Congratulations on your purchase of an LDG Balun or Unun. These quality units greatly expand the utility of your LDG Automatic Tuner, allowing much greater flexibility in the type of antenna and transmission line you can use. LDG's Baluns and Ununs are inspired by the designs of Jerry Sevick, W2FMI (SK) in his classic book *Transmission Line Transformers*.

All LDG Baluns and Ununs are rated at 200 watts PEP, and are water resistant; they are intended for outdoor use. Each weighs 6 oz, and measure 5"x2.5"x1.2".

Baluns and Ununs

Balanced antennas are electrically symmetrical and do not rely on connection to the ground; an ordinary dipole is a good example of a balanced antenna. Unbalanced antennas are asymmetrical and rely on a ground, such as a $\frac{1}{4}$ wave vertical antenna operated against a ground plane. All modern radios have unbalanced outputs, and all coaxial cable is unbalanced.


Feeding a balanced antenna with an unbalanced transmission line can lead to unwanted RF current distribution that degrades performance. Baluns are circuits that match an unbalanced transmission line to a balanced load, and can adjust the impedance ratio as needed. Ununs match unbalanced transmission lines to unbalanced loads, also adjusting impedance.

RU-9:1

The RU-9:1 is a 9:1 Unun that allows you to easily match an end-fed long wire antenna with your LDG Automatic Antenna Tuner. Connection is made by a 5-way, twist-on binding post; connect the red post to the antenna. A ground terminal connection is available for an optional counterpoise or radial system. The RU-9:1 is intended to match a long wire antenna of 30-135', with or without a ground.

RU-1:1


The RU-1:1 is a 1:1 Unun intended to help remove unwanted RF from the coax cable shield. It is normally used as a common-mode RF choke for short coax cable runs or non-resonant antennas. The RU-1:1 features SO-239 sockets for both input and output.

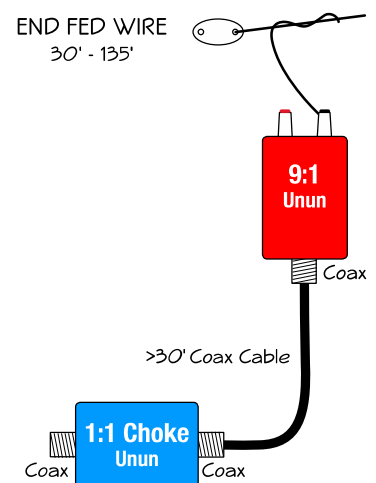

DIPOLE
Length = $468/\text{freq}$


RBA-1:1

The RBA-1:1 is a 1:1 Balun designed to allow easy interface to Dipoles, Inverted Vees and other center insulated wire antennas. The Balun can operate "stand alone", or it can be used with an LDG Automatic Tuner. It may be used with any of your long, random, ladder line or balanced antenna projects. Connection is made by 5-way, twist-on binding posts.



RBA-4:1


The RBA-4:1 is a 4:1 Balun that allows your LDG Automatic Antenna Tuner to easily match an antenna fed with Twin-lead or Ladder-line. The Balun can also operate "stand alone" without a Tuner. It may be used with any twin-lead or ladder-line antenna projects. Connection is made by 5-way, twist-on binding posts.

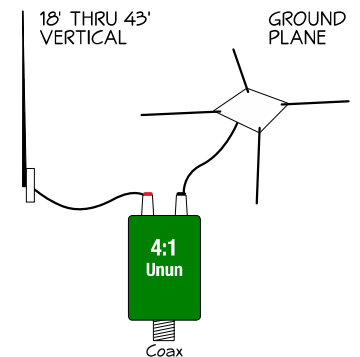

RU-4:1

The RU-4:1 is a 4:1 Unun designed to allow your LDG Automatic Antenna Tuner to easily match vertical and end-fed antennas. It can also operate "stand alone", and may not require an LDG Tuner for resonant verticals. It may also be used with any antenna project where a 4:1 Unun is needed. Connection is by 5-way, twist-on binding posts; connect the red post to the antenna.

LADDER LINE/TWIN LEAD



Warranty

All LDG Baluns and Ununs are warranted for two years against defects in parts or workmanship. This warranty is fully transferable; if you sell or give away your product, simply give the new owner the receipt, and the remainder of the warranty goes with it. If service is required, refer to LDG's web page for information on how to request warranty service.

Visit us on the web at www.ldgelectronics.com



WHERE TO USE LDG BALUNS & UNUNS




Not sure which balun or unun is right for your antenna? See our handy chart below to help you determine which is the best fit for your set-up. All LDG baluns and ununs handle up to 200 Watts PEP and cover frequencies from 1.8 to 30MHz. Visit us at www.ldgelectronics.com or see your favorite dealer today to learn more and to see our full line of products.


\$30 ea. | 200 Watts PEP
1.8-30MHz

Dipole

Length = $468/\text{freq}$

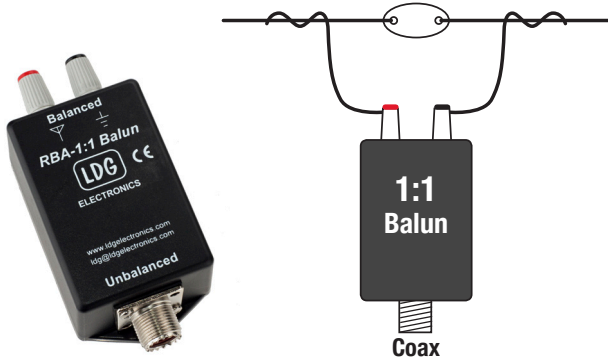


Ladder Line/Twin Lead

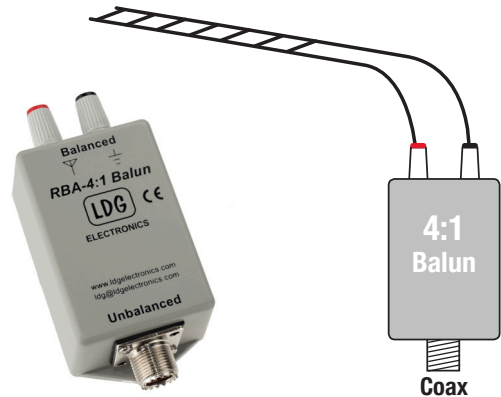

25'- 45' Vertical

Ground Plane

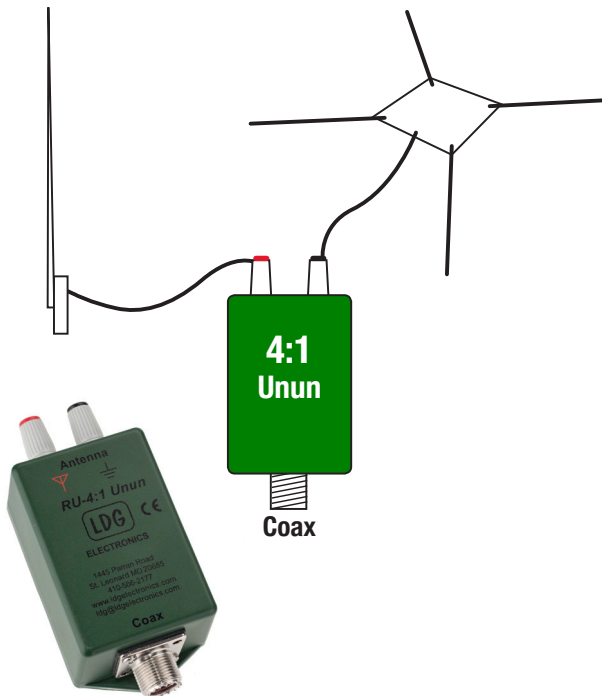

End Fed Wire

30' - 125'

